

Tankless water heaters for the professional

# ***ProTankless***<sup>™</sup> **GWH 425 EF**

## **Features:**

- ▶ Electronic ignition
- ▶ 80% average efficiency
- ▶ Built-in power vent for horizontal through-wall venting
- ▶ Venting: 4" single-wall stainless or galvanized
- ▶ Modulating gas valve – constant temperature at varying flow rates
- ▶ Available in Natural Gas (NG) or Liquid Propane (LP)
- ▶ 15-Year warranty




**Safety and Ingenuity  
– Guaranteed.**



**BOSCH**

Invented for life




Temperature Control Knob \_\_\_\_\_

**Model GWH 425 EF Venting Configurations**

Approved Vent Terminal  
 (FXHOOD or other approved terminal)  
 The FXHOOD is design approved with the 425 EF  
 and has a built-in back draft flapper to prevent  
 negative air from freezing the unit.

GWH 425 EF Installation Clearances	
Top (A)	12"
Front (B)	4"
Back	0"
Sides	4"
Floor (C)	12"

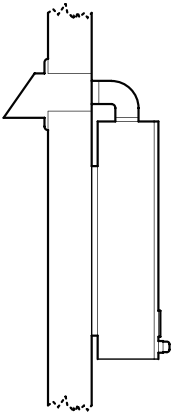

4" single wall venting only. Use stainless steel (AL29-4C) or galvanized pipe of 26 minimum gauge must be used. Each connection must be properly sealed.

