

Tankless water heaters for the professional

ProTankless[™] **GWH 425 HN**

Features:

- ▶ Hydro-generated ignition
- ▶ 80% average efficiency
- ▶ Venting: 5" double-wall type B-vent – Natural Draft
- ▶ Modulating gas valve – constant temperature at varying flow rates
- ▶ Available in Natural Gas (NG) or Liquid Propane (LP)
- ▶ 15-Year warranty



No Electricity Needed.




BOSCH

Invented for life

Hydro-generated, pilot ignition – No electricity required for the 425 HN model.

GWH 425 HN Technical Specifications

Power Input	Natural Gas: 28,000 - 117,000 Btu
	LP Gas: 28,000 - 117,000 Btu
Minimum Flow to Activate	0.5 gallons per minute (gpm)
Flow Rates	45°F rise @ 4.2 gpm
	55°F rise @ 3.4 gpm
	65°F rise @ 2.9 gpm
	77°F rise @ 2.4 gpm
	90°F rise @ 2.1 gpm
Energy Factor	NG: .80 LP: .84
Thermal Efficiency	NG: 80% LP: 83%
Dimensions	29.75" h x 18.25" w x 8.75" d
Weight	40 lbs.
Modulating Gas Valve	Yes
Ignition	Hydro-generated

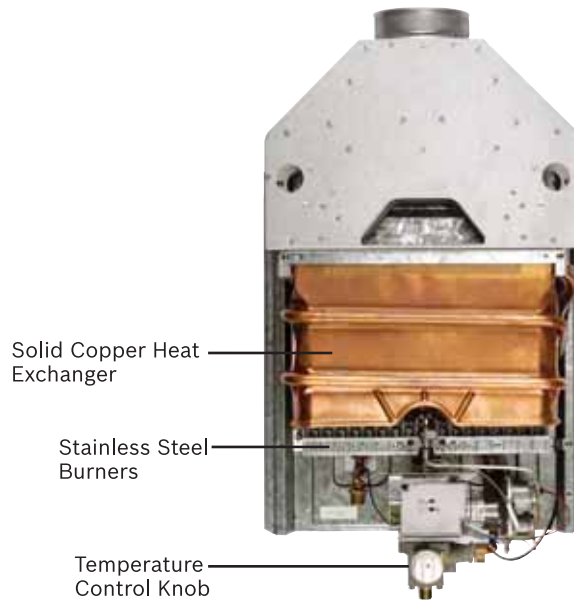


GWH 425 HN Installation Specifications


Gas Connection	½" Male NPT
Water Connections	½" Male NPT
NG Gas Pressure	Minimum: 7" WC
	Maximum: 14" WC
LP Gas Pressure	Minimum: 11" WC
	Maximum: 14" WC
Water Pressure	Minimum: 30 PSI
	Maximum: 150 PSI

GWH 425 HN Installation Clearances

Top (A)	12"
Front (B)	4"
Back	0"
Sides	4"
Floor (C)	12"



Model GWH 425 HN Venting Configurations

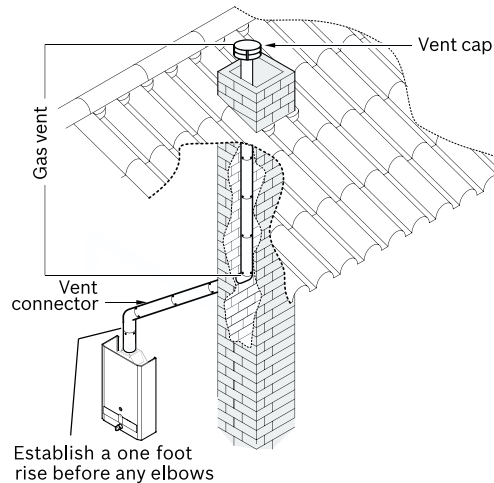

*On a combustible wall surface the unit should be mounted away from the wall to provide adequate clearance of the vent pipe.



BBT NORTH AMERICA CORPORATION
Bosch Group

Bosch Water Heating
340 Mad River Park
Waitsfield, VT 05673

Telephone: 866.642.3198
www.boschpro.com



BOSCH
Invented for life