

Tankless water heaters for the professional

***ProTankless*[™] GWH 425 PN**

Features:

- ▶ Standing pilot ignition
- ▶ 78% average efficiency
- ▶ Endless hot water for one major application at a time
- ▶ 5" double-wall type B vent – Natural draft.
- ▶ Modulating gas valve ensures constant temperature at varying flow rates
- ▶ Pressure relief valve included
- ▶ Available in natural gas (NG) or liquid propane (LP)
- ▶ 15-year warranty



No Electricity Needed.





BOSCH

Invented for life



Standing pilot ignition, no electricity required for the 425 PN model.

GWH 425 PN Technical Specifications	
Power Input	Natural Gas: 31,000-117,000 Btu
	LP Gas: 31,000-117,000 Btu
Minimum Flow to Activate	0.5 gallons per minute (gpm)
Flow Rates	45°F rise @ 4.2 gpm
	55°F rise @ 3.4 gpm
	65°F rise @ 2.9 gpm
	77°F rise @ 2.4 gpm
	90°F rise @ 2.1 gpm
Energy Factor	NG: .69 LP: .79
Thermal Efficiency	NG: 78% LP: 78%
Dimensions	25.75" h x 16.75" w x 8.5"d
Weight	33 lbs.
Modulating Gas Valve	Yes
Ignition	Standing Pilot
Optional Accessory	Power Vent for Horizontal Venting (AQ4)

GWH 425 PN Installation Specifications	
Gas Connection	¾" Male NPT
Water Connections	½" Male NPT
NG Gas Pressure	Minimum: 7" WC
	Maximum: 14" WC
LP Gas Pressure	Minimum: 11" WC
	Maximum: 14" WC
Water Pressure	Minimum: 30 PSI
	Maximum: 150 PSI

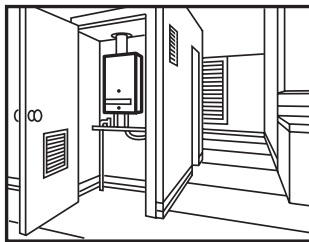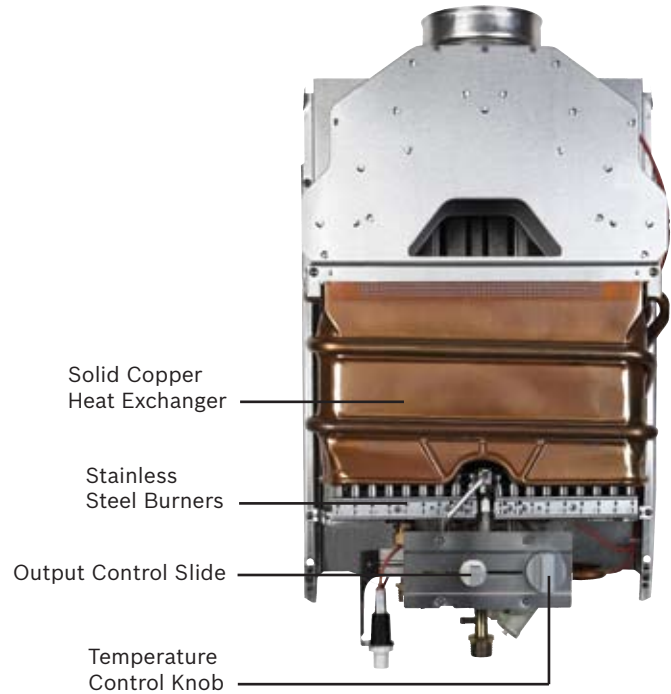

Closet Installation of GWH 425 PN with proper venting and combustion air supply shown.

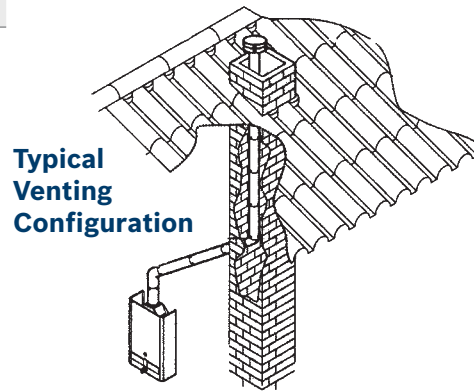

Power Vent Option
Illustrating the side wall vent option that allows horizontal venting and elimination of the chimney. (Part #AQ4)



BBT NORTH AMERICA CORPORATION
Bosch Group

Bosch Water Heating
340 Mad River Park
Waitsfield, VT 05673

Telephone: 866.642.3198
www.boschpro.com



BOSCH

Invented for life